

03/02/2015



FFP3 Shell mask with valve



Colors	Ref.
White	23316


General Description / Materials

- ✓ FFP3 Shell mask with valve
- ✓ Filter media in melt-blown electrostatic polypropylene
- ✓ Outer layer in polypropylene SMS
- ✓ Inner layer in polyethylene terephthalate
- ✓ Tightening synthetic latex free rubber elastic
- ✓ Nose cushion in polyethylene foam

Areas of use



Packaging

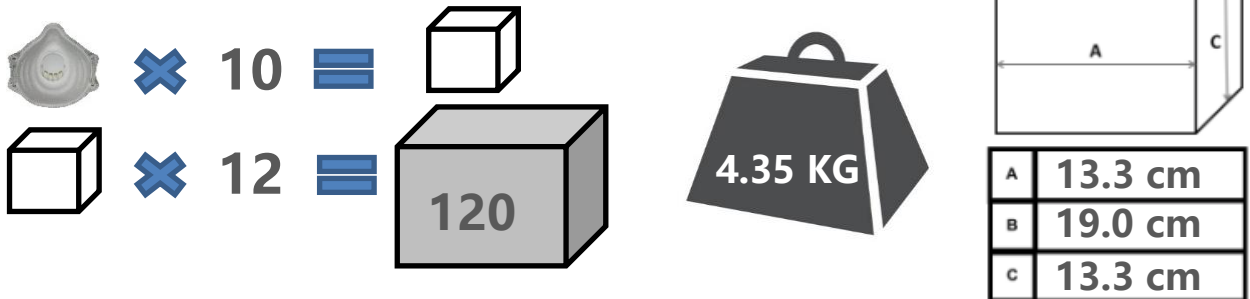

Specific Advantages

- ⊕ To avoid to breath bad particules
- ⊕ Protection against toxic solid and liquid aerosols up to 50xOEL
- ⊕ Protect against calcium carbonate, china clay, cement, cellulose, sulfur, cotton, flour, carbon, ferrous metal, hardwood, glass fibers, plastic, vegetable oils and mineral oils, quartz, copper, aluminum, bacteria, fungi and mycobacterium tuberculosis, chromium, manganese, nickel, platinum, metal dust and smoke, viruses and enzymes.
- ⊕ Specially used in textile industry, craft industry, metallurgical industry, mining industry, underground civil engineering, woodwork, welding, melting, metal cutting out, hospital, laboratories, medical controls, pharmaceutical industry, toxic waste treatment, batteries making (Ni-Cad)

Standards

This mask is in conformity with the model of individual safety equipment which correspond to

The CE Type-examination certificate 593787

Delivered by **BSI (notified body n° 0086)**

EN149 2001+A1 2009

