


# TECHNICAL DATASHEET







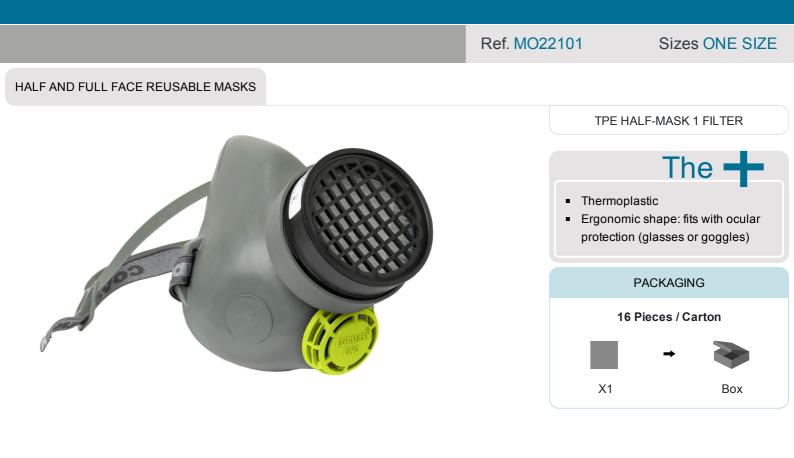

### DESCRIPTION

- TPE : no contact with silicone or latex
- · Ergonomic shape: fits with ocular protection
- Exhalation valve: reduce breathing resistance and avoid fog and heat inside the mask
- Simple, intuitive and ergonomic adjustment loop combined with a comfortable harness.
- Compatible with SUPAIR filters 22140 (P2) or 22170 (P3)
- Weight: 115g

### SECTORS

Agriculture, sylviculture and fishing

Heavy industry

Light industry

Infrastructure, building industry

### coverguard

## **EURMASK UNO**

### TECHNICAL FEATURES

Features

Half-mask in TPE thermoplastic rubber with screw thread for 1 filter (not included). With soft silicon exhalvation valve. Fabric and rubber elastic strap with plastic harness.

#### **Fields of application**

For regular and prolonged use in a dangerous environment: carpentry, wood industry, cement industry, metal cutting ... Filter not included. Depending on the filter you choose, offers a protection against toxic dust or very toxic dust such as iron, wood, cement dust, pollen, lead, copper, fiberglass...

### LEGISLATION

This equipment conforms to the personal protective equipment model covered by the EC type-examination certificate **311-99**. Delivered by **ITALCERT** (**426**).

EN140:1998

Half masks and quarter masks

Retailer stamp

UPDATE 02/28/2020